
NOTES


PRECAST MANHOLES WHICH HAVE BEEN APPROVED FOR USE BY THE WATER AND SEWER DEPARTMENT, ARE ACCEPTABLE SUBSTITUTES. DIMENSIONS AND MATERIAL SHALL CONFORM TO THE CAST-IN-PLACE DETAIL SHOWN BELOW. INDIVIDUAL UNITS WILL BE INSPECTED AND STAMPED BY THE DIVISION OF FIELD ENGINEERING PRIOR TO DELIVERY TO THE SITE.


2-NO. 2 HOOPS FOR 4" OR THINNER RING. TIE WITH NO. 4 WIRE. FOR 6" AND OVER USE 4 NO. 2 HOOPS.



MANHOLE RING & COVER 26-3/4" PROVIDE PRECAST ADJUSTMENT RINGS, BRICK AND MORTAR COLLAR OR COMBINATION. 6"

ADJUSTING RING DETAIL

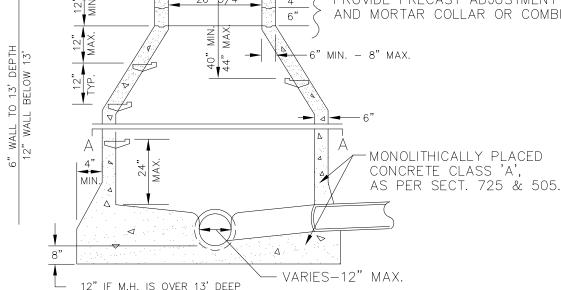



SECTION A-A

DETAIL NO. G-3430 CITY OF GOODYEAR STANDARD DETAIL

APPROVED BY: Goodyear Standards and Policies Committee 7/97

CONCRETE SANITARY SEWER MANHOLE NON-REINFORCED & PRECAST

STEPS

DETAIL NO. G-3430